




ASSEMBLY GUIDE

Model: GB5000S

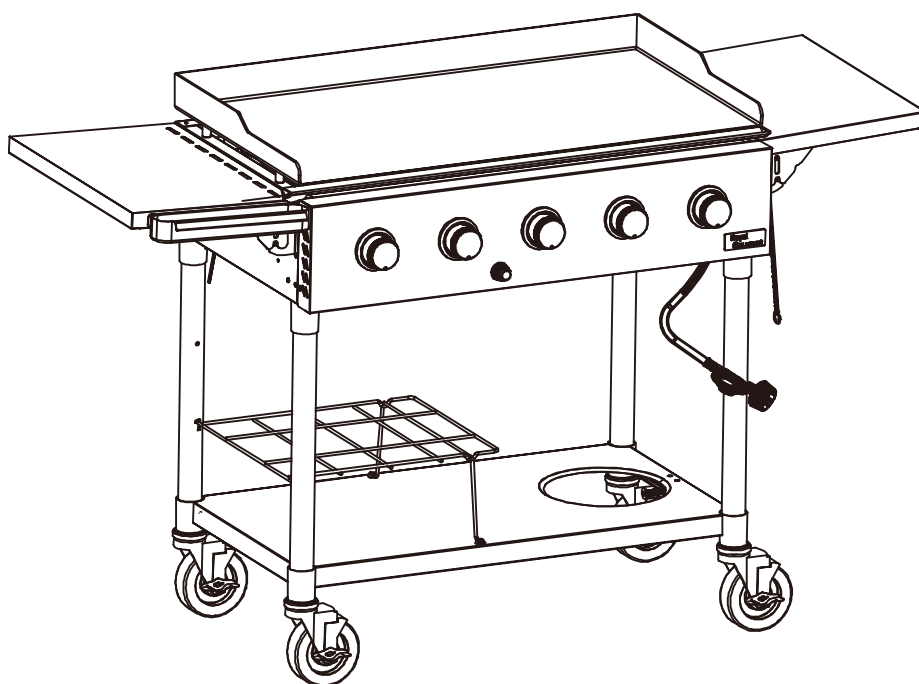

Deluxe 5-Burner Stainless Steel Gas Griddle

FOR YOUR SAFETY!


Use outdoors only! Do not use it in a building, garage or any other enclosed areas.
Read the instructions before assembling and using the appliance.
DO NOT use the grill unless it is completely assembled and all the parts are securely fastened.
This grill will become very hot, do not move it during operation. Keep children and pets away.

CONTACT US FIRST!

This grill has been made to high quality standards. If you have any questions that are not addressed in this manual, or you need parts, please call our customer service hotline or send an email to service@royalgourmetusa.com

Learn more at:

www.royalgourmetcorp.com

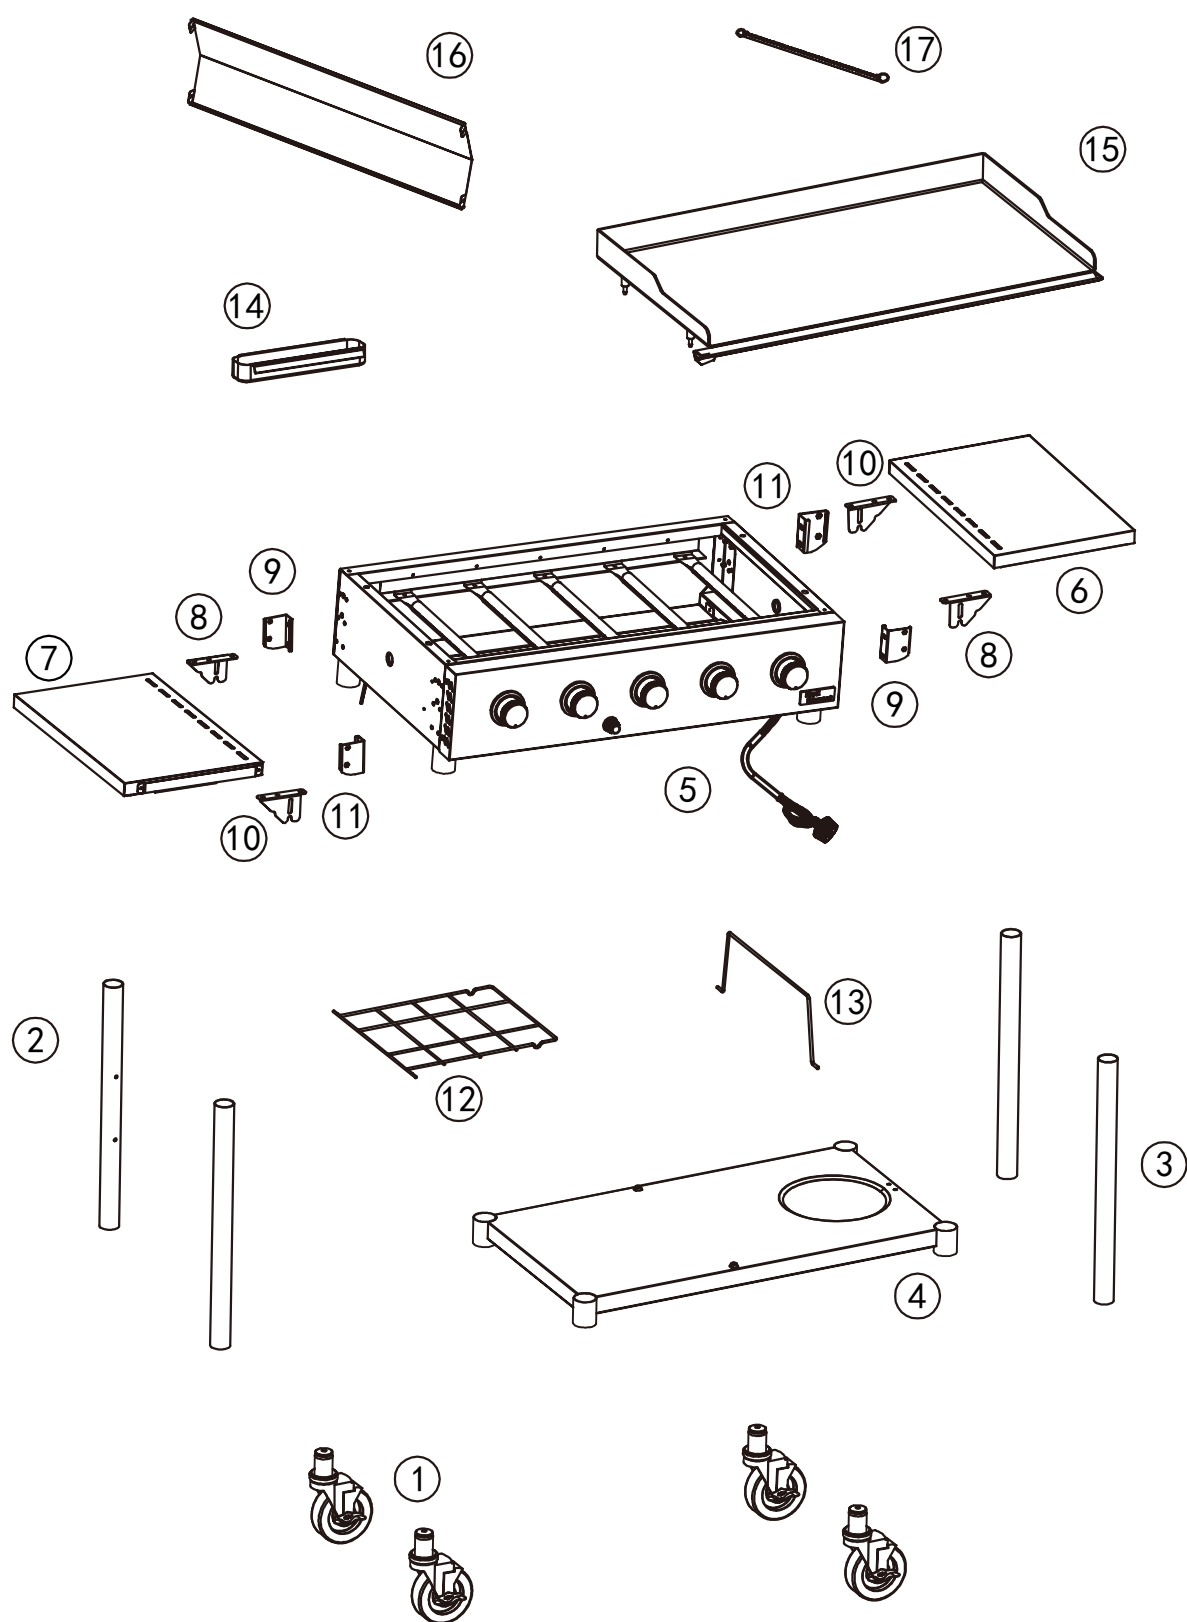

Ref	Description	Illustration	QTY
1.	Caster		4
2.	Left leg (LF/LB)		2
3.	Right leg (RF/RB)		2
4.	Bottom shelf		1
5.	Main body		1
6.	Side table(R)		1
7.	Side table(L)		1
8.	Side table joint (L)		2
9.	Side table brace (L)		2


Ref	Description	Illustration	QTY
10.	Side table joint (R)		2
11.	Side table brace (R)		2
12.	Wire Rack		1
13.	Holder		1
14.	Grease cup		1
15.	Cooking griddle		1
16.	Thermal baffle		1
17.	Extention wire		1

A	Allen Key	1 pc	B	M6x12	20pcs	C	M8x8	8pcs	D	Bolt	8pcs	E	Battery	1 pc
F	Split pin	2pcs	G	M4x12	4pcs									

PREPARATION

Royal
Gourmet®

Before beginning assembly, make sure all parts are present. Compare parts with packaged contents list and diagram above. If any parts are missing or damaged, do not attempt to assemble the products. Contact customer service for replacement parts via telephone or email.




Phillips Screwdriver



Wrench


- Estimated assembly time: 40 minutes
- Tools required for assembly:
Phillips Screwdriver (not included) and Wrench (not included)
- Note: The right and left sides of the grill are designed as if you are facing the front of the grill.

Step 1

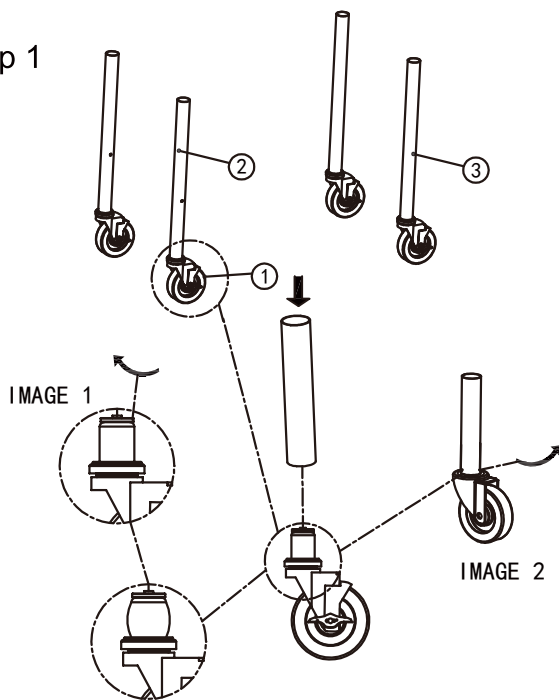


Insert the caster(1) to leg (2), hold the caster still, twist the leg clockwise until fixed. Then hold the leg still, twist the caster anti-clockwise until fixed. Repeat these steps to other casters and legs.

Step 2

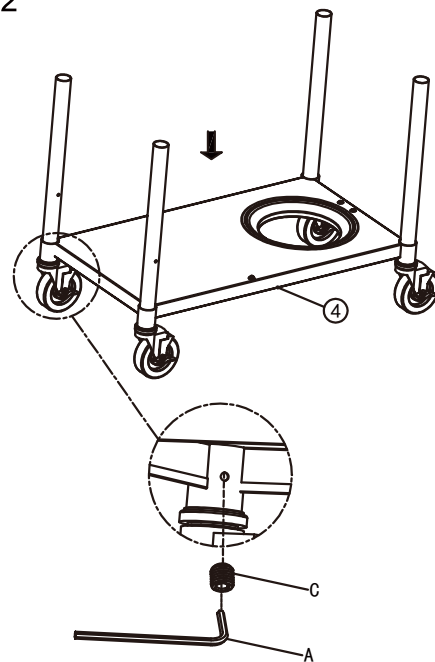


Insert the bottom shelf(4) to legs, fix it with 4 bolts (C) using the allen key (A).

Step 3

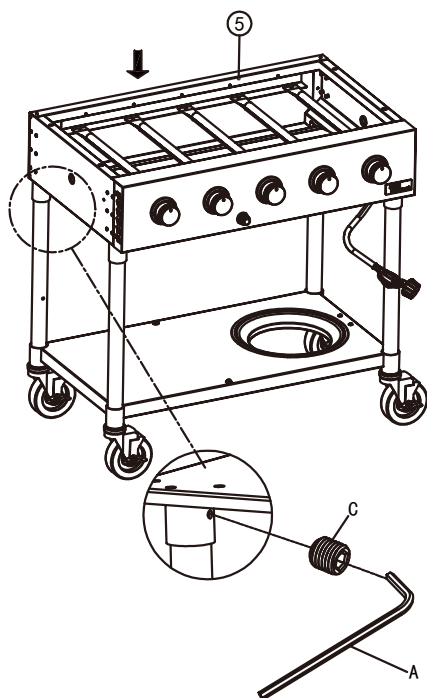


Place the main body (5) onto the cart, secure it to the cart brace with 4 bolts (C) using the allen key (A).

Step 4

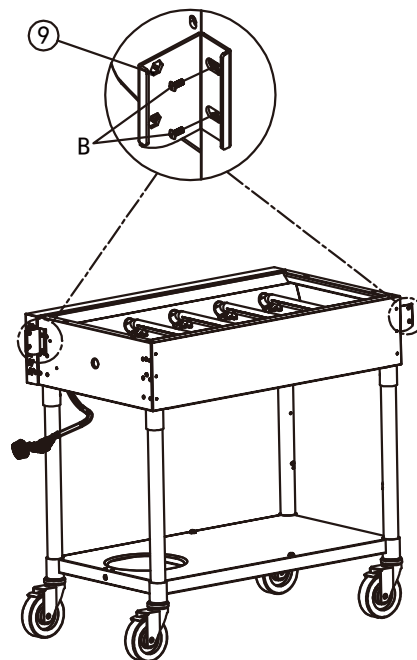


Assemble the side shelf braces (9) to shown positions of main body with 4 bolts (B).

Step 5

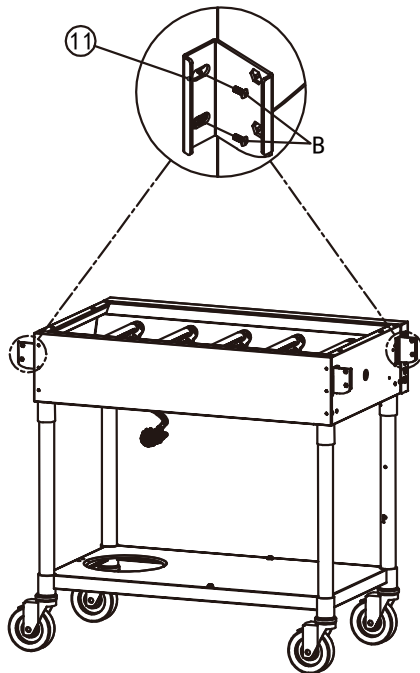


Assemble the side shelf braces (11) to shown positions of main body with 4 bolts (B).

Step 6

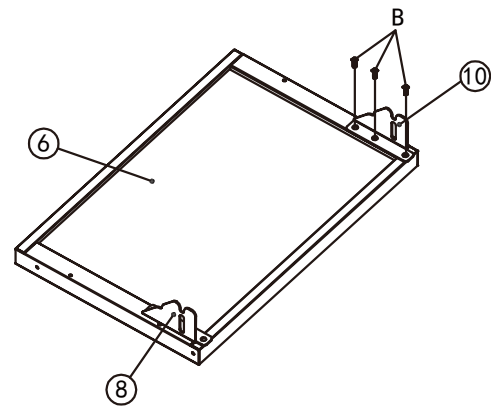


Fasten the side shelf joints (8,10) to side tables (6) with 6 bolts (B).

Step 7

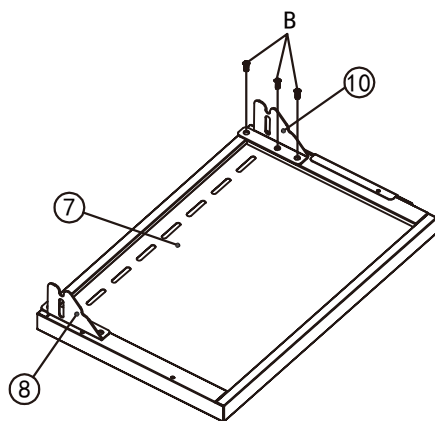


Fasten side shelf joints (8,10) to side tables (7) with 6 bolts (B).

Step 8

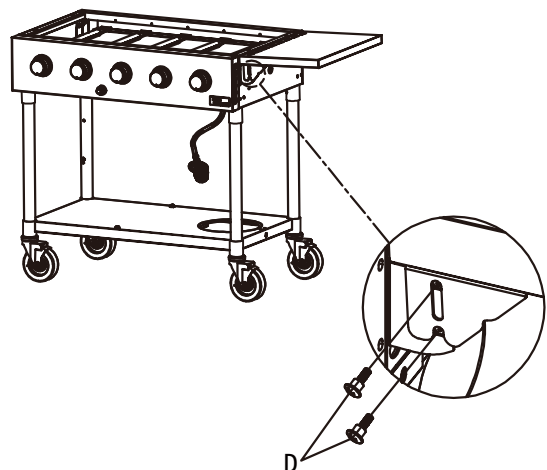


Assemble the right side table to braces with 4 bolts (D).

Step 9

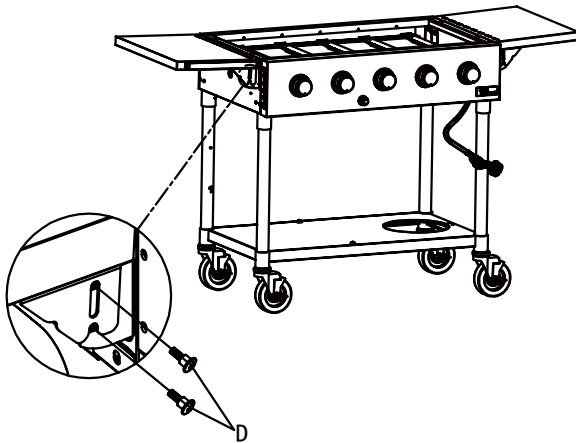


Assemble the left side table to braces with 4 bolts (D).

Step 10

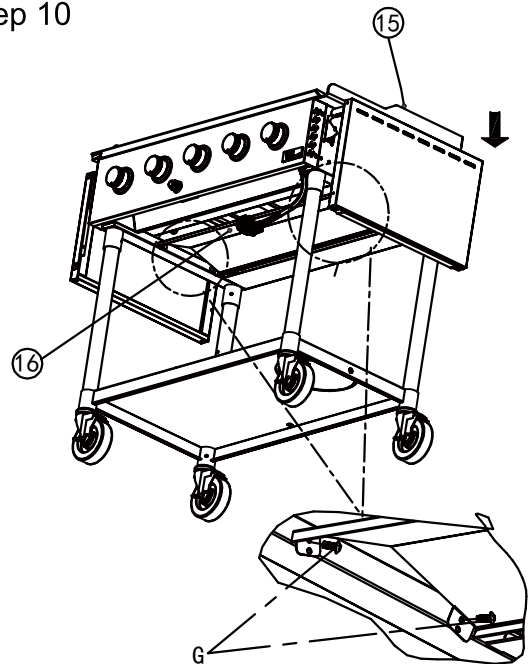


Place the giddle (15) onto the main body. Install the thermal baffle (16) underneath the main body with 4 bolts (G).

Step 11

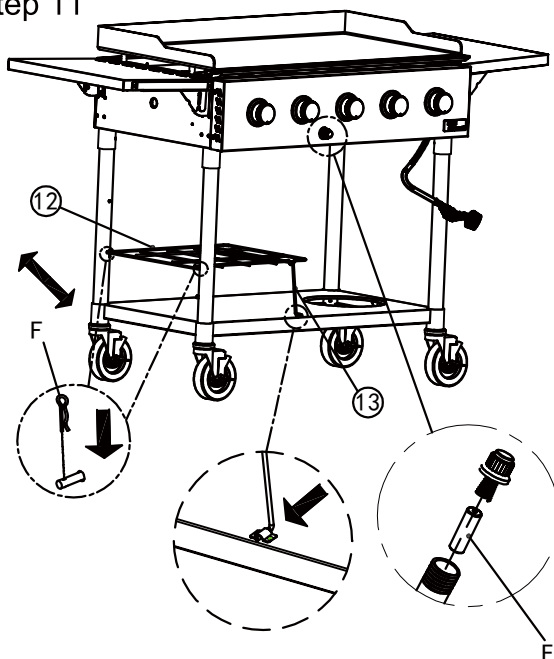

Assemble 1 AA battery (E) into the igniter. Insert ends of wire rack (12) into holes on left legs, and fix by 2 split pins (F), pass holder (13) through bottom of two middle wires of the wire rack, and insert holder ends into bottom shelf brackets.

Step 12

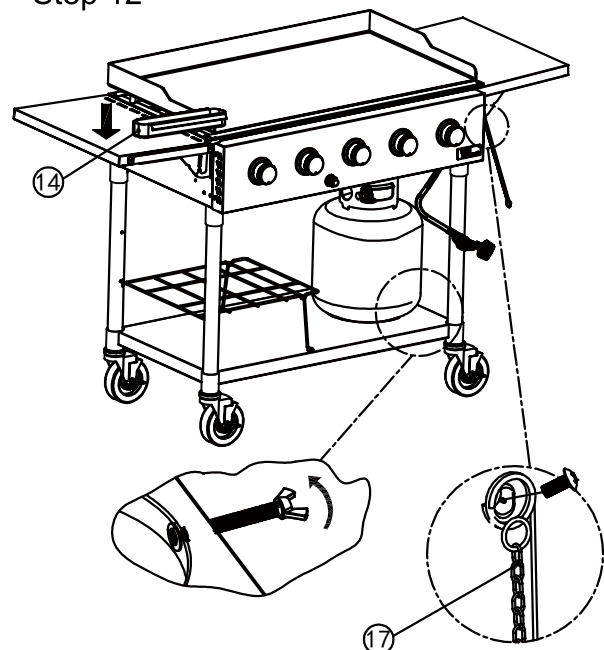

Fasten the grease cup (14) on the left side table. Loosen 1 bolt of left side of control panel, fasten the extension wire (17) to main body, screw back the bolt as shown. Tighten the tank by the screw rod pre-assembled.